
HP i7-2600
3.4 GHz Sandy Bridge

Dependable legacy desktop processing with 4 physical cores. Powered by 1x Intel Core i7-2600 running at a swift 3.4 GHz and 8MB L3 cache for standard office tasks.

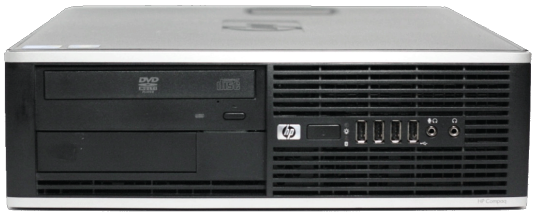

No Commitment - Price per Month

The price is for a full calendar month, regardless of how many days are within that month. You can request to cancel the service anytime ("no contract"), but the service will be terminated, regardless if it's used or not, in the last day of that month.

Prices does not include taxes

	Total
Monthly	**$44.24**
One-Time Setup	**$0.00**
Delivery in	

PRODUCT SPECIFICATIONS

The price includes the system described below. Components marked with ◯ can be replaced with others in the same category from Alternative Options list. Some options might not work if they are mixed together in this system

Good For	General Purpose
Processor Model	**Core i7-2600**
Processor Core	4 core, 8 threads
Processor Cache	**2 MB cache/core** - 8 MB Smart Cache
Processor Frequency	3.4 GHz, turbo up to 3.8 GHz
Processor Technology	**HP i7** with Legacy Intel Core Processors (Sandy Bridge platform)
System Score	Ranked 943rd by PassMark in the Multithreaded CPU Server Benchmarks and 747th in the...
RAM	8 GB DDR3-1333MHz (PC3-10600)
RAM Type	DDR3
RAM Upgrade	Up to 32 GB DDR3-1333MHz (PC3-10600), 4 UDIMM slots. The memory bandwidth in ...
PCI Express Slots	Slot 1 PCIe 2.0 x1 low profile Slot 2 PCIe 2.0 x4 low profile Slot 3 PCIe 2.0 x16 low profile
'OS' Storage Controller	Intel Q67 PCH. Supports SATA drives at speeds up to 3Gb/s (SATA2) and provides software...
'OS' Drives	A dedicated SSD drive for the 'OS' (operating system) is available as a standard option. You ca...
'Data' Storage Controller	Optional. When not installed, 'Data' drives are connected to 'OS' Storage Controller
'Data' Drives	**SATA3 SSD** - up to 3 x 3.84 TB **SATA3 HDD** - up to 3 x 24 TB
'Data' Drives Supported (Internal)	No Hard Drive included. Supports up to 3 LFF (3,5") or SFF (2.5") SATA drives.
Ethernet Ports	**1 Gbps** Intel 82579LM wih 24 KB packet buffer. Not recommended for high network I/O u...
Remote Management	Always-On Console KVM over Internet via VNC Plus Viewer, remote power on/off based on In...
Power Supply	One (non-redundant) power source, 240W active PFC @ 100-240V
Power consumption	60W on average
Unit Size	1U when installed in a 8-units same chassis bundle. Small Form Factor chassis: Height 4.0 x...
Datacenter	Voxility IR1 in **Bucharest** (1)
Unit Size	1U when installed in a 8-units same chassis bundle. Small Form Factor chassis: Height 4.0 x...
Drives for 'OS'	1 x 240 GB (or more) SATA3 SSD (2)

500 Internal Server Error